

Aurora

Source form: `aurora_switch_dir`

Fixture requests: 8

Real slice requests: 500

Switch-setting traces per QPU, binarized to event bits.

switch settings



QCA


Source form: `shot_matrix`

Fixture requests: 4

Real slice requests: 500

Shot matrices mapped to stabilizer-event indices.

shot matrix

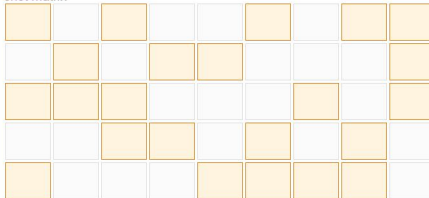

GKP

Source form: `count_table_json`

Fixture requests: 11

Real slice requests: not used in this run

Count summaries expanded to line-oriented replay requests.

count table



Normalized decoder IO request line

`code_id / round_index / n_qubits`

`events: (index, time_ns, type)`

`noise: sigma + gate/meas/idle/loss`

`metadata: provider/backend/source_id`

Replay engines

MWPM

UF

BP

Neural-MWPM

same input contract, swappable decoder