


cc-agent-messenger daemon uses:  
Socket Mode (Events API) →  
Web API (chat.postMessage) ←



Slack API

#channel1

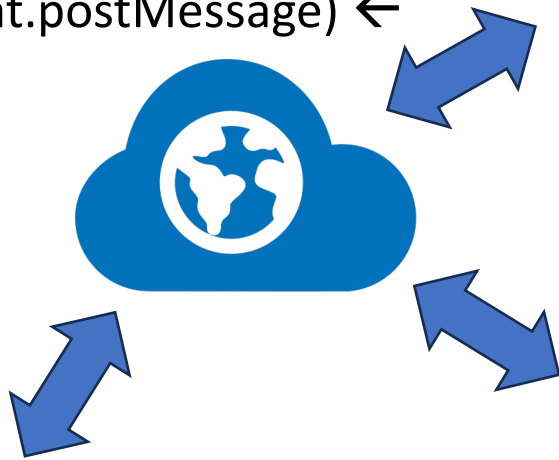

@Slack App A

#channel2



@Slack App B

## C1: headless agents




cc-agent-messenger daemon  
(for Slack App A)

Claude Code CLI, Codex CLI, GitHub Copilot CLI


(No project skill is used.)

## C0: resident Claude Code session



cc-agent-messenger daemon  
(for Slack App B)

Claude Code in VS Code or an interactive Claude Code CLI.

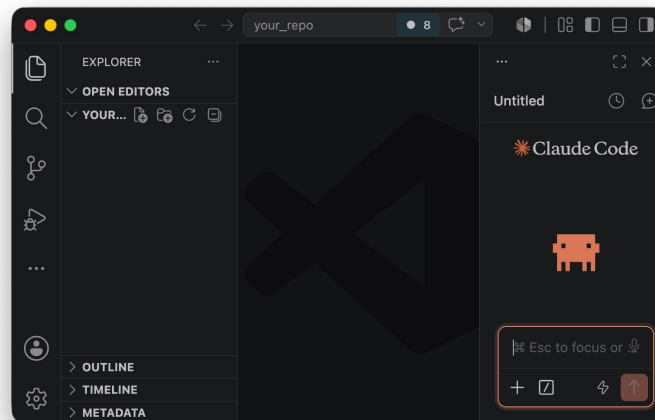

```
<your_repo>/  
├── .claude/  
│   └── skills/  
│       └── cc-agent-messenger/  
│           └── SKILL.md  
└── .cc-agent-messenger/  
    ├── config.toml  
    └── profile.json
```

Uses project SKILL.md