

RobotLog2DB

v. 1.6.0

Tran Duy Ngoan

24.02.2026

Contents

1	Introduction	1
2	Description	2
2.1	Get Robot Framework XML result	2
2.1.1	Robot Framework test case Settings	2
2.1.2	Sample Robot Framework Test Case	3
2.1.3	Execute Robot Framework test case(s) to get result file	4
2.2	Tool features	5
2.2.1	Usage	5
2.2.2	Verify provided arguments	6
2.2.3	Searching *.xml result file(s)	6
2.2.4	Handle essential information for TestResultWebApp	6
2.2.5	Append to existing execution result	8
2.2.6	Switch Database Access Interface	9
2.3	Display on WebApp	10
3	robotlog2db.py	11
3.1	robotlog2db-robotlog2db-collect-xml-result-files	11
3.2	robotlog2db-robotlog2db-validate-xml-result	11
3.3	robotlog2db-robotlog2db-is-valid-uuid	12
3.4	robotlog2db-robotlog2db-is-valid-config	12
3.5	robotlog2db-robotlog2db-get-from-tags	13
3.6	robotlog2db-robotlog2db-get-branch-from-swversion	13
3.7	robotlog2db-robotlog2db-format-time	14
3.8	robotlog2db-robotlog2db-retrieve-result-starttime	14
3.9	robotlog2db-robotlog2db-retrieve-result-endtime	14
3.10	robotlog2db-robotlog2db-process-suite-metadata	14
3.11	robotlog2db-robotlog2db-process-metadata	15
3.12	robotlog2db-robotlog2db-process-suite	15
3.13	robotlog2db-robotlog2db-process-test	16
3.14	robotlog2db-robotlog2db-process-config-file	16
3.15	robotlog2db-robotlog2db-normalize-path	17
3.16	robotlog2db-robotlog2db-robotlog2db	17
3.17	robotlog2db-robotlog2db-logger	18
3.17.1	robotlog2db-robotlog2db-logger-config	18
3.17.2	robotlog2db-robotlog2db-logger-log	18
3.17.3	robotlog2db-robotlog2db-logger-log-warning	19

3.17.4	robotlog2db-robotlog2db-logger-log-error	19
4	Appendix	20
5	History	21

Chapter 1

Introduction

robotframework-robotlog2db is a command-line tool that enables you to import Robot Framework XML result files into TestResultWebApp's database for presenting an overview about the whole test execution and details of each test result.

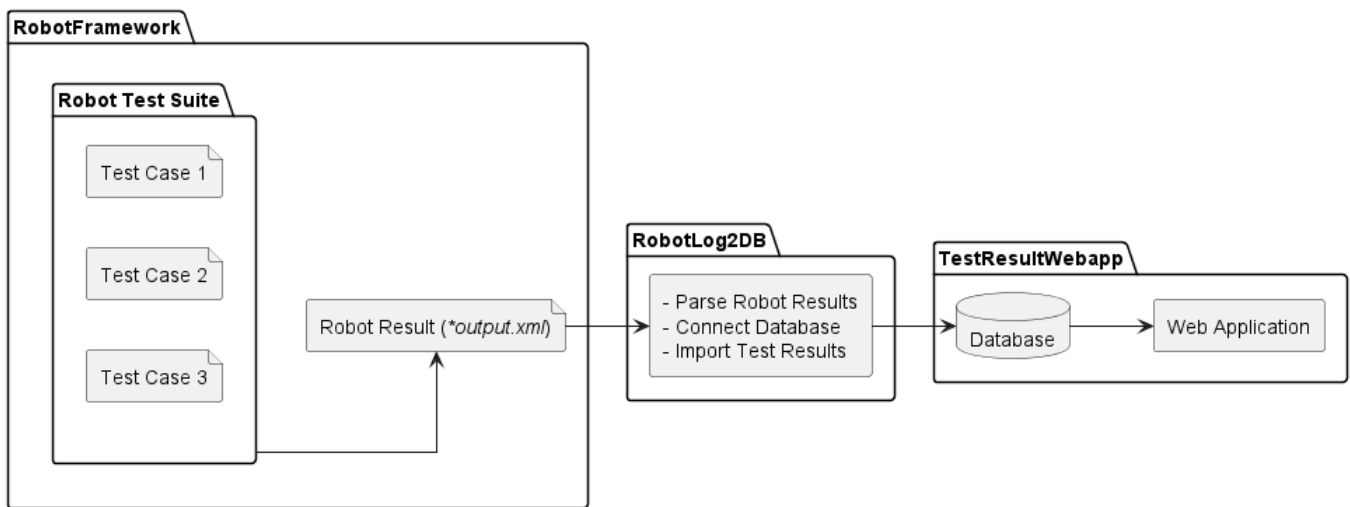


Figure 1.1: Tool data flow

robotframework-robotlog2db tool requires several arguments, including the location of the [Robot Framework XML result file\(s\)](#) to parse all information of test execution result and TestResultWebApp's database credential for importing that result.

[TestResultWebApp](#) requires some mandatory information to manage and display the test result properly. Therefore, they should be provided in Robot Framework test case before execution, then they will be available in XML result file for importing.

However, you can use optional arguments of **robotframework-robotlog2db** tool to provide those data if they are missing or you want to overwrite them with the expected values.

Finally, **robotframework-robotlog2db** also allows you to append existing results in the database, which is helpful when you need to update previous test results or add the missing XML result file(s) from previous tool execution.

Chapter 2

Description

TestResultWebApp requires **project/variant**, **software version** as essential data to manage results in database and some optional information such as **component**, ... to visualize test data properly on web application.

These data are not the mandatory fields of Robot Framework test case or XML result file. So that, they should be defined as `Metadata` and `[Tags]` in Robot Framework test case, then the generated XML result file includes all necessary information of test execution for importing to TestResultWebApp's database.

The next section [Get Robot Framework XML result](#) will introduce you the Robot Framework test case settings to make necessary information available for displaying on TestResultWebApp.

In case you have already had the Robot Framework XML file(s) without those definitions, do not worry because **robotframework-robotlog2db** will handle those data with default values.

Futhermore, you can specify them with your expected values by providing as command line arguments when executing **robotframework-robotlog2db** tool. The detail of those command line arguments are described in [Specify essential information with optional arguments](#) section.

2.1 Get Robot Framework XML result

2.1.1 Robot Framework test case Settings

The below document is recommended Robot Framework test case `Settings` before execution. So that, the generated *.xml result file will contain all necessary information.

For the whole test execution:

- Project/Variant

```
Metadata    project    ${Project_name}
```

- Versions

```
Metadata    version_hw    ${Software_version}
Metadata    version_hw    ${Hardware_version}
Metadata    version_test  ${Test_version}
```

For the Suite/File information:

- Description/Documentation

```
Documentation  ${Suite_description}
```

- Author

```
Metadata    author    ${Author_name}
```

- Component

```
Metadata    component    ${Component_name}
```

- Test Tool - Test framework and Python version, e.g **Robot Framework 3.2rc2 (Python 3.9.0 on win32)**

```
Metadata    testtool    ${Test_tool}
```

- Test Machine

```
Metadata    machine    ${COMPUTERNAME}
```

- Tester

```
Metadata    tester    ${USER}
```

For test case information:

- Issue ID

```
[Tags]      ISSUE-${ISSUE_ID}
```

- Testcase ID

```
[Tags]      TCID-${TC_ID}
```

- Requirement ID

```
[Tags]      FID-${REQ_ID}
```

2.1.2 Sample Robot Framework Test Case

Sample Robot Framework test case with the necessary information for importing to TestResult WebApp's database:

```
*** Settings ***
# Test execution level
Metadata    project      ROBFW          # Project/Variant
Metadata    version_sw   SW_VERSION_0.1  # Software version
Metadata    version_hw   HW_VERSION_0.1  # Hardware version
Metadata    version_test TEST_VERSION_0.1 # Test version

# File/Suite level
Documentation      This is description for robot test file
Metadata    author      Tran Duy Ngoan (RBVH/ECM1)
Metadata    component    Import_Tools
Metadata    testtool     Robot Framework 4.1.3 (Python 3.9.16 on win32)
Metadata    machine      ${COMPUTERNAME}
Metadata    tester       ${USER}

*** Test Cases ***
Testcase 01
    [Tags]      ISSUE-001    TCID-1001    FID-112    FID-111
    Log         This is Testcase 01

Testcase 02
    [Tags]      ISSUE-RTC-003    TCID-1002    FID-113
    Log         This is Testcase 01
```

Listing 2.1: Sample Robot Framework testcase

Hint

Instead of setting `Metadata` in Robot Framework test case, you can also specify them as the `--metadata` [command line argument](#) when executing Robot Framework test cases. Furthermore, in case you are using RobotFramework AIO, above highlighted `Metadata` definitions are not required because they have been handled by `RobotFramework_TestsuitesManagement` library within `Suite Setup`.

2.1.3 Execute Robot Framework test case(s) to get result file

Now, execute your Robot Framework test case(s) with your IDE or [using command line](#) to get the Robot result file

```
robot your_testcases.robot
```

Or with python module

```
python -m robot your_testcases.robot
```

The default name of Robot result file is *output.xml*. Its filename can be changed by specifying other filename with argument `--output (-o)` when executing Robot Framework test case(s)

```
robot your_testcases.robot --output path/to/robot_result.xml
```

2.2 Tool features

After getting the Robot Framework **.xml* result file(s), you can use the **robotframework-robotlog2db** tool to import the test results into TestResultWebApp's database.

Its usage and enhance features are described as below.

2.2.1 Usage

Use below command to get tools's usage:

```
RobotLog2DB -h
```

The tool's usage should be showed as below:

```
usage: RobotLog2DB (RobotXMLResult to TestResultWebApp importer) [-h] [-v]
      [--recursive] [--dryrun] [--append] [--UUID UUID]
      [--variant VARIANT] [--versions VERSIONS] [--config CONFIG]
      resultxmlfile server user password database

RobotLog2DB imports XML result files (default: output.xml) generated by the
Robot Framework into a WebApp database.

positional arguments:
resultxmlfile          absolute or relative path to the result file or directory
                        of result files to be imported.
server                 server which hosts the database (IP or URL).
user                   user for database login.
password               password for database login.
database               database schema for database login.

optional arguments:
-h, --help             show this help message and exit
-v, --version           version of the RobotLog2DB importer.
--recursive            if set, then the path is searched recursively for output
                        files to be imported.
--dryrun               if set, then verify all input arguments (includes DB
                        connection) and show what would be done.
--append               is used in combination with --UUID <UUID>.If set, allow to
                        append new result(s) to existing execution result UUID in
                        --UUID argument.
--UUID UUID            UUID used to identify the import and version ID on webapp.
                        If not provided RobotLog2DB will generate an UUID for the
                        whole import.
--variant VARIANT      variant name to be set for this import.
--versions VERSIONS    metadata: Versions (Software;Hardware;Test) to be set for
                        this import (semicolon separated).
--config CONFIG        configuration json file for component mapping information.
--interface {db,rest}  database access interface.
--testrunurl TESTRUNURL
                        link to test execution job: Jenkins job, Gitlab CI/CD pipeline, ...
```

As above instruction, **robotframework-robotlog2db** tool requires 5 positional arguments which contains all required information for importing.

The below command is simple usage with all required arguments to import robot results into TestResultWebApp's database:

```
RobotLog2DB <output.xml> <localhost> <db\_user> <db\_pw> <db\_name>
```

Besides the executable file **robotframework-robotlog2db** you can also run tool as a Python module

```
python -m RobotLog2DB <output.xml> <localhost> <db\_user> <db\_pw> <db\_name>
```

Beside the required arguments, there are optional arguments which provides some enhance features as the following sections.

2.2.2 Verify provided arguments

Sometimes, we just want to validate the **.xml* and database connection without changing anything in the database, the optional argument `--dryrun` can be used in this case.

When executing in dryrun mode, **robotframework-robotlog2db** will:

- Verify the provided Robot Framework **.xml* result file is valid or not.
- Verify the database connection with provided credential.
- Verify other information which given in optional arguments.
- Just print all test cases will be imported without touching database.

This feature will helps you to ensure that there is no error when executing **robotframework-robotlog2db** tool (normal mode) to create new record(s) and update TestResultWebApp's database.

2.2.3 Searching *.xml result file(s)

The first argument `resultxmlfile` of **robotframework-robotlog2db** can be a single file or the folder that contains multiple result files.

When the folder is used, **robotframework-robotlog2db** will only search for **.xml* file(s) under given directory and exclude any file within subdirectories as default.

In case you have result file(s) under the subdirectory of given folder and want these result files will also be imported, the optional argument `--recursive` should be used when executing **robotframework-robotlog2db** command.

When `--recursive` argument is set, **robotframework-robotlog2db** will walk through the given directory and its subdirectories to discover and collect all available **.xml* for importing.

For example: your result folder has a structure as below:

```
logFolder
|_____ result_1.xml
|_____ result_2.xml
|_____ subFolder_1
|           |_____ result_sub_1.xml
|           |_____ subSubFolder
|                   |_____ result_sub_sub_1.xml
|_____ subFolder_2
|           |_____ result_sub_2.xml
```

- Without `--recursive`: only **result_1.xml** and **result_2.xml** are found for importing.
- With `--recursive`: all **result_1.xml**, **result_2.xml**, **result_sub_1.xml**, **result_sub_2.xml** and **result_sub_sub_1.xml** will be imported.

2.2.4 Handle essential information for TestResultWebApp

Default values

TestResultWebApp requires **Project**, **Software version** to manage the execution results and **Component** to group test cases in the displayed charts.

In case above information is missing in [test case settings](#) during the test case execution, that leads to the missing information in the *output.xml* result file. So, this missing information will be set to default values when importing with **robotframework-robotlog2db** tool:

- **Project**: will be set to default value `ROBFW` if not defined.
- **Software version**: will be set to execution time `%Y%m%d_%H%M%S` as default value.
- **Component**: will be set to default value `unknown` if not defined.

Specify essential information with optional arguments

You can also provide essential information in command line when executing the **robotframework-robotlog2db** tool with below optional arguments:

Warning

These below settings may overwrite the existing information of `project`, `version_sw` and `component` which have been defined in Robot Framework test case in [above section](#).

So, **only** use these arguments in case you want to define the missing information or overwrite the existing values with your expected values for the importing result.

- `--variant VARIANT` To specify the **Project/Variant** information.
- `--versions VERSIONS` To specify the **Software, Hardware** and **Test** versions information.
- `--config CONFIG` To provide a configuration `*.json` file as `CONFIG` argument. Currently, the configuration `*.json` supports below settings:
 - `"variant"` to specify the **Project/Variant** as `string` value.
 - `"version_sw"` to specify the **Software version** information as `string` value.
 - `"version_hw"` to specify the **Hardware under-test version** as `string` value.
 - `"version_test"` to specify the **Test version** as `string` value.

Notice

These above settings with `--config CONFIG` will have lower priority than the commandline arguments `--variant VARIANT` and `--versions VERSIONS`

- `"testtool"` to specify the **Test toolchain** as `string` value.
- `"tester"` to specify the **Test user** as `string` value.
- `"components"` to specify the **Component** information which will be displayed on [TestResultWebApp](#). Value can be:

- * `string`: to specify the same **Component** for all test casea within this execution.

```
{
  "components" : "atest",
  ...
}
```

- * `object`: to define the mapping json object between **Component** info as key and a directory path (or list of directory paths) to Robot Framework test file (`*.robot` file) as value.

```
{
  "components" : {
    "cli"       : "robot/cli",
    "core"      : "robot/core",
    "external"  : "robot/external",
    "keywords"  : "robot/keywords",
    "libdoc"    : "robot/libdoc",
    "connectivity" : [
      "selftest/serial",
      "selftest/ssh",
      "selftest/tcpip"
    ]
  },
  ...
}
```

As above sample configuration, the `"components"` key contains the mappings for individual components, such as **cli**, **core**, **external**, **keywords** and **libdoc**, where the value is the directory path for the corresponding Robot Framework files.

Additionally, the **connectivity** key is an example of a mapping where the value is a list of directory paths, indicating that the **connectivity** component is composed of all Robot Framework files located in multiple directories, namely **selftest/serial**, **selftest/ssh** and **selftest/tcpip**.

In other words, the component mapping can be explained as below:

- Test case(s) under **robot/cli** folder is belong **cli** component

- Test case(s) under **robot/core** folder is belong **core** component
- ...
- **connectivity** component contains all test case(s) which is located under **selftest/serial**, **selftest/ssh** and **selftest/tcpip** folders.

In case the given configuration **.json* is not valid or unsupported key is used, the corresponding error will be raised.

2.2.5 Append to existing execution result

robotframework-robotlog2db also allows you to append new test result(s) (missing from previous import, on other test setup, ...) into the existing execution result (identified by the **UUID**) in TestResultWebApp's database. The combination of optional arguments `--UUID <UUID>` and `--append` should be used in this case.

The `--append` makes **robotframework-robotlog2db** run in append mode and the `--UUID <UUID>` is used to specify the existing UUID of execution result to be appended.

For example, the result with UUID **c7991c07-4de2-4d65-8568-00c5556c82aa** is already existing in TestResultWebApp's database and you want to append result(s) in **output.xml** into that execution result.

The command will be used as below:

```
python -m RobotLog2DB output.xml localhost testuser testpw testdb --UUID ↩
↪ c7991c07-4de2-4d65-8568-00c5556c82aa --append
```

If the argument `--UUID <UUID>` is used without `--append`:

- An error will be thrown and the import job is terminated immediately if the provided **UUID** is already existing

```
FATAL ERROR: Execution result with UUID 'c7991c07-4de2-4d65-8568-00c5556c82aa' is ↩
↪ already existing.
      Please use other UUID (or remove '--UUID' argument from your command) ↩
↪ for new execution result.
      Or add '--append' argument in your command to append new result(s) to ↩
↪ this existing UUID.
```

- The importing execution result will have an identifier as the provided **UUID** if that **UUID** is not existing

If the argument `--append` is used and:

- given UUID in `--UUID <UUID>` argument is existing: the new result(s) will be appended to that UUID
- given UUID in `--UUID <UUID>` argument is not existing: tool will be terminated immediately with below error

```
FATAL ERROR: Execution result with UUID 'c7991c07-4de2-4d65-8568-00c5556c82aa' is not ↩
↪ existing for appending.
      Please use an existing UUID to append new result(s) to that UUID.
      Or remove '--append' argument in your command to create new execution ↩
↪ result with given UUID.
```

- `--UUID <UUID>` is not provided: tool will be terminated immediately with below error

```
FATAL ERROR: '--append' argument should be used in combination with '--UUID <UUID>' ↩
↪ argument
```

Notice

When using append mode and `project / variant`, `version_sw` are provided within `--variant VARIANT`, `--versions VERSIONS` or `--config CONFIG` arguments, they will be validated with the existing values in database.

An error will be raised in case the given value is not matched with the existing ones. E.g:

```
FATAL ERROR: Given version software 'my_version' is different with existing ↩
↪ value 'SW01' in database.
```

2.2.6 Switch Database Access Interface

In addition to direct database connections — which can sometimes be restricted or prohibited due to security concerns — the **robotframework-robotlog2db** tool also provides users with an alternative way (interface) to import test data into the database, namely the REST API.

`--interface INTERFACE`: An optional argument to specify the database backend interface. The default value is `db` (direct connection to MySQL database). It can also be set to `rest` to import data into the database via a REST API.

Direct Connection Backend (interface="db")

The default mode of operation for the import tool is the direct connection to the MySQL database. This means that when you run the tool without specifying the `--interface` option, it automatically uses the `db` interface, establishing a direct connection to the MySQL database.

You can also explicitly specify the `db` interface by using the `--interface` option with the value `db`.

```
RobotLog2DB <output.xml> <db\_host> <db\_user> <db\_password> <db\_name> --interface db
```

This method provides flexibility, allowing users to choose between interfaces explicitly or rely on the default behavior.

REST API Backend (interface="rest")

The 'rest' interface allows users to import data into the database through a REST API. This mode is particularly useful in scenarios where direct database connections are restricted or not feasible, such as when the database is secured and direct connections are not allowed.

```
RobotLog2DB <output.xml> <api\_endpoint> <api\_user> <api\_password> <db\_name> ↵  
↵ --interface rest
```

Additional Notes



This feature offers easy switching between database backends, making it transparent and convenient for end-users.

When using the REST API interface, ensure that you have the necessary credentials and permissions to access the REST API endpoints.

2.3 Display on WebApp

As soon as the *output.xml* file(s) is imported successfully to database, the result for that execution will be available on [TestResultWebApp](#).

Above test case settings in Robot Framework test case will be reflected on **Dashboard** (General view) and **Data table** (Detailed view) as below figures:

Execution result metadata:

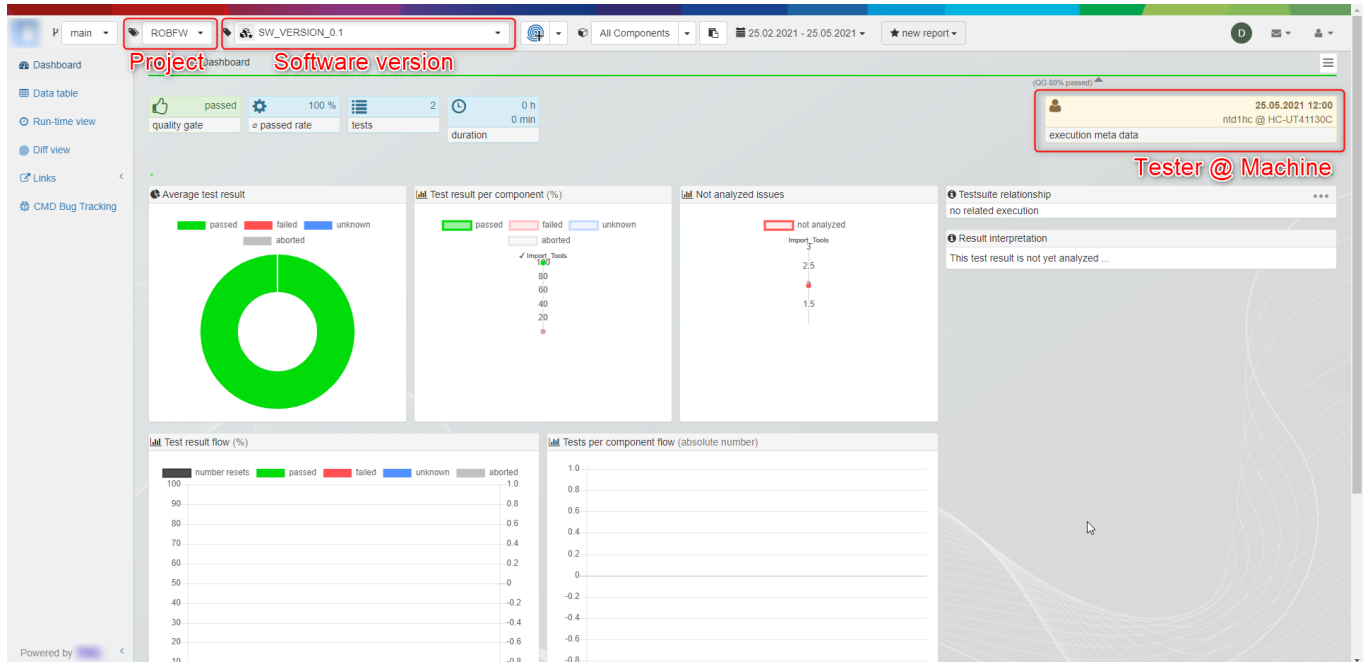


Figure 2.1: Dashboard view

Suite/File metadata and test case information:

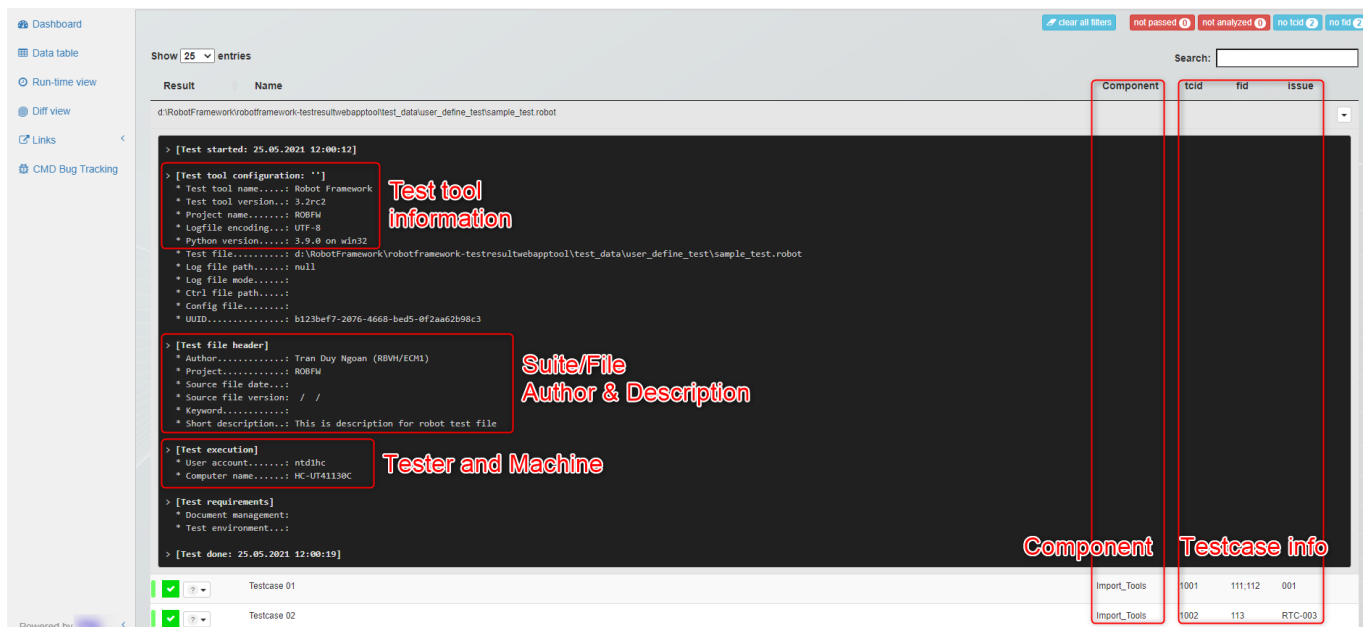


Figure 2.2: Datatable view

Chapter 3

robotlog2db.py

3.1 robotlog2db-robotlog2db-collect-xml-result-files

Collect all valid Robot xml result file in given path.

Arguments:

- path
/ *Condition*: required / *Type*: str /
Path to Robot result folder or file to be searched.
- search_recursive
/ *Condition*: optional / *Type*: bool / *Default*: False /
If set, the given path is searched recursively for xml result files.

Returns:

- lFoundFiles
/ *Type*: list /
List of valid xml result file(s) in given path.

3.2 robotlog2db-robotlog2db-validate-xml-result

Verify the given xml result file is valid or not.

Arguments:

- xml_result
/ *Condition*: required / *Type*: str /
Path to Robot result file.
- xsd_schema
/ *Condition*: optional / *Type*: str / *Default*: <installed_folder>/xsd/robot.xsd /
Path to Robot schema *.xsd file.

System Message

WARNING/2 in <string>, line 45
[Inline emphasis start-string without end-string.](#)

- exit_on_failure
/ *Condition*: optional / *Type*: bool / *Default*: True /
If set, exit with fatal error if the schema validation of given xml file failed.

Returns:

- / *Type*: bool /
True if the given xml result is valid with the provided schema *.xsd.

System Message

WARNING/2 in <string>, line 57

[Inline emphasis start-string without end-string.](#)

3.3 robotlog2db-robotlog2db-is-valid-uuid

Verify the given UUID is valid or not.

Arguments:

- uuid_to_test
/ *Condition*: required / *Type*: str /
UUID to be verified.
- version
/ *Condition*: optional / *Type*: int / *Default*: 4 /
UUID version.

Returns:

- bValid
/ *Type*: bool /
True if the given UUID is valid.

3.4 robotlog2db-robotlog2db-is-valid-config

Validate the json configuration base on given schema.

Default schema supports below information:

```
CONFIG_SCHEMA = {
    "components": [str, dict],
    "variant"    : str,
    "version_sw": str,
    "version_hw": str,
    "version_test": str,
    "testtool"   : str,
    "tester"     : str
}
```

Arguments:

- dConfig
/ *Condition*: required / *Type*: dict /
Json configuration object to be verified.
- dSchema
/ *Condition*: optional / *Type*: dict / *Default*: CONFIG_SCHEMA /
Schema for the validation.

- `bExitOnFail`
/ *Condition*: optional / *Type*: bool / *Default*: True /
If True, exit tool in case the validation is fail.

Returns:

- `bValid`
/ *Type*: bool /
True if the given json configuration data is valid.

3.5 robotlog2db-robotlog2db-get-from-tags

Extract testcase information from tags.

Example: TCID-xxxx, FID-xxxx, ...

Arguments:

- `lTags`
/ *Condition*: required / *Type*: list /
List of tag information.
- `reInfo`
/ *Condition*: required / *Type*: str /
Regex to get the expected info (ID) from tag info.

Returns:

- `lInfo`
/ *Type*: list /
List of expected information (ID)

3.6 robotlog2db-robotlog2db-get-branch-from-swversion

Get branch name from software version information.

Convention of branch information in suffix of software version:

- All software version with .0F is the main/feature branch. The leading number is the current year. E.g. 17.0F03
- All software version with .1S, .2S, ... is a stabi branch. The leading number is the year of branching out for stabilization. The number before "S" is the order of branching out in the year.

Arguments:

- `sw_version`
/ *Condition*: required / *Type*: str /
Software version.

Returns:

- `branch_name`
/ *Type*: str /
Branch name.

3.7 robotlog2db-robotlog2db-format-time

Format the given time string to TestResultWebApp's format for importing to db.

Arguments:

- `stime`
/ *Condition*: required / *Type*: str /
String of time.

Returns:

- `sFormattedTime`
/ *Type*: str /
TestResultWebApp's time as format `%Y-%m-%d %H:%M:%S`.

3.8 robotlog2db-robotlog2db-retrieve-result-starttime

Retrieve starttime information from given result object (TestSuite or TestCase). In case the starttime in given suite is 'N/A', it will try to get this information from its children suite/test.

Arguments:

- `stime`
/ *Condition*: required / *Type*: *TestSuite* or *TestCase* object /
Result object to retrieve starttime.

Returns:

- / *Type*: str /
Start time of given result.

3.9 robotlog2db-robotlog2db-retrieve-result-endtime

Retrieve endtime information from given result object (TestSuite or TestCase). In case the endtime in given suite is 'N/A', it will try to get this information from its children suite/test.

Arguments:

- `stime`
/ *Condition*: required / *Type*: *TestSuite* or *TestCase* object /
Result object to retrieve endtime.

Returns:

- / *Type*: str /
End time of given result.

3.10 robotlog2db-robotlog2db-process-suite-metadata

Try to find metadata information from all suite levels.

Metadata at top suite level has a highest priority.

Arguments:

- `suite`
/ *Condition*: required / *Type*: *TestSuite* object /
Robot suite object.
- `default_metadata`
/ *Condition*: optional / *Type*: dict / *Default*: `DEFAULT_METADATA` /
Initial Metadata information for updating.

Returns:

- `dMetadata`
/ *Type*: dict /
Dictionary of Metadata information.

3.11 robotlog2db-robotlog2db-process-metadata

Extract metadata from suite result bases on `DEFAULT_METADATA`.

Arguments:

- `metadata`
/ *Condition*: required / *Type*: dict /
Robot metadata object.
- `default_metadata`
/ *Condition*: optional / *Type*: dict / *Default*: `DEFAULT_METADATA` /
Initial Metadata information for updating.

Returns:

- `dMetadata`
/ *Type*: dict /
Dictionary of Metadata information.

3.12 robotlog2db-robotlog2db-process-suite

Process to the lowest suite level (test file):

- Create new file and its header information
- Then, process all child test cases

Arguments:

- `db`
/ *Condition*: required / *Type*: *CDataBase* object /
CDataBase object.
- `suite`
/ *Condition*: required / *Type*: *TestSuite* object /
Robot suite object.
- `_tbl_test_result_id`
/ *Condition*: required / *Type*: str /
UUID of test result for importing.

- `root_metadata`
/ *Condition*: required / *Type*: dict /
Metadata information from root level.
- `dConfig`
/ *Condition*: required / *Type*: dict / *Default*: None /
Configuration data which is parsed from given json configuration file.

Returns:*(no returns)*

3.13 robotlog2db-robotlog2db-process-test

Process test case data and create new test case record.

Arguments:

- `db`
/ *Condition*: required / *Type*: *CDataBase* object /
CDataBase object.
- `test`
/ *Condition*: required / *Type*: *TestCase* object /
Robot test object.
- `file_id`
/ *Condition*: required / *Type*: int /
File ID for mapping.
- `test_result_id`
/ *Condition*: required / *Type*: str /
Test result ID for mapping.
- `metadata_info`
/ *Condition*: required / *Type*: dict /
Metadata information.
- `test_number`
/ *Condition*: required / *Type*: int /
Order of test case in file.

Returns:*(no returns)*

3.14 robotlog2db-robotlog2db-process-config-file

Parse information from configuration file:

- `component`:

```
{
    "components" : {
        "componentA" : "componentA/path/to/testcase",
        "componentB" : "componentB/path/to/testcase",
        "componentC" : [
            "componentC1/path/to/testcase",
```

```

        "componentC2/path/to/testcase"
    ]
}

```

Then all testcases which their paths contain componentA/path/to/testcase will be belong to componentA, ...

- `variant, version_sw`: configuration file has low priority than command line.

Arguments:

- `config_file`
/ *Condition*: required / *Type*: str /
Path to configuration file.

Returns:

- `dConfig`
/ *Type*: dict /
Configuration object.

3.15 robotlog2db-robotlog2db-normalize-path

Normalize path file.

Arguments:

- `sPath`
/ *Condition*: required / *Type*: str /
Path file to be normalized.
- `sNPath`
/ *Type*: str /
Normalized path file.

3.16 robotlog2db-robotlog2db-robotlog2db

Import robot results from `output.xml` to `TestResultWebApp`'s database.

Flow to import Robot results to database:

1. Process provided arguments from command line.
2. Parse Robot results.
3. Connect to database.
4. Import results into database.
5. Disconnect from database.

Arguments:

- `args`
/ *Condition*: required / *Type*: `ArgumentParser` object /
Argument parser object which contains:
 - `resultxmlfile` : path to the xml result file or directory of result files to be imported.

- *server* : server which hosts the database (IP or URL).
- *user* : user for database login.
- *password* : password for database login.
- *database* : database name.
- *recursive* : if True, then the path is searched recursively for log files to be imported.
- *dryrun* : if True, then verify all input arguments (includes DB connection) and show what would be done.
- *append* : if True, then allow to append new result(s) to existing execution result UUID which is provided by --UUID argument.
- *UUID* : UUID used to identify the import and version ID on TestResultWebApp.
- *variant* : variant name to be set for this import.
- *versions* : metadata: Versions (Software;Hardware;Test) to be set for this import.
- *config* : configuration json file for component mapping information.
- *testrunurl*: link to test execution job: Jenkins job, Gitlab CI/CD pipeline, ...

Returns:*(no returns)*

3.17 robotlog2db-robotlog2db-logger

Logger class for logging message.

3.17.1 robotlog2db-robotlog2db-logger-config

Configure Logger class.

Arguments:

- `output_console`
/ *Condition*: optional / *Type*: bool / *Default*: True /
Write message to console output.
- `output_logfile`
/ *Condition*: optional / *Type*: str / *Default*: None /
Path to log file output.
- `dryrun`
/ *Condition*: optional / *Type*: bool / *Default*: True /
If set, a prefix as 'dryrun' is added for all messages.

Returns:*(no returns)*

3.17.2 robotlog2db-robotlog2db-logger-log

Write log message to console/file output.

Arguments:

- `msg`
/ *Condition*: optional / *Type*: str / *Default*: " /
Message which is written to output.
- `color`
/ *Condition*: optional / *Type*: str / *Default*: None /
Color style for the message.

- indent
/ *Condition*: optional / *Type*: int / *Default*: 0 /
Offset indent.

Returns:

(no returns)

3.17.3 robotlog2db-robotlog2db-logger-log-warning

Write warning message to console/file output.

Arguments:

- msg
/ *Condition*: required / *Type*: str /
Warning message which is written to output.

Returns:

(no returns)

3.17.4 robotlog2db-robotlog2db-logger-log-error

Write error message to console/file output.

Arguments:

- msg
/ *Condition*: required / *Type*: str /
Error message which is written to output.
- fatal_error
/ *Condition*: optional / *Type*: bool / *Default*: False /
If set, tool will terminate after logging error message.

Returns:

(no returns)

Chapter 4

Appendix

About robotframework-robotlog2db:

Author

Tran Duy Ngoan (Ngoan.TranDuy@vn.bosch.com)

Version

1.6.0 (24.02.2026)

Short Description

Imports robot results to TestResultWebApp database

Homepage

[robotframework-robotlog2db](#)

Documentation

[Readme](#)
[Main Documentation](#)

Sources

[Repository](#)

Issues

[Issues](#)

Python required

`>=3.11`

License

Apache-2.0

Chapter 5

History

0.1.0	07/2022
<i>Initial version</i>	
1.2.1	22.08.2022
<i>Rework repository's document bases on GenPackageDoc</i>	
1.2.2	13.10.2022
<ul style="list-style-type: none">- Fix findings and enhance README and document files- Change argument name 'outputfile' to 'resultxmlfile'	
1.2.3	10.11.2022
<i>Rename package to RobotLog2DB</i>	
1.2.4	18.11.2022
<i>Add -append argument which allow to append into existing UUID</i>	
1.3.0	06.12.2022
<ul style="list-style-type: none">- Rework optional arguments in command line- Improve coding: logging messages, shorten variable names, ...	
1.3.1	09.01.2023
<i>Improve messages when verify configuration json file</i>	
1.3.2	28.02.2023
<ul style="list-style-type: none">- Rename key to 'components' in configuration json file- Change implementation of append mode to raise errors without proper given UUID- Enhance console log with component and append mode information- Add more supported keys in configuration json file	
1.3.3	01.03.2023
<i>Add a validation for xmlresultfile with robot schema</i>	
1.3.4	13.03.2023
<ul style="list-style-type: none">- Add a validation for existing project/variant and version_sw in db when using append mode- Remove db maxlength handlers: truncations and validation	
1.3.5	21.03.2023
<i>Support 4 byte characters for importing to db</i>	
1.3.6	05.04.2023

<ul style="list-style-type: none"> - Enhance console log with test case counter and component statistics - Add try/except for database access 	
1.3.7	14.06.2023
Update README with new instruction for installation and image's links	
1.3.8	21.06.2023
Fix issue with suite.starttime at root suite is N/A	
1.3.9	23.06.2023
<ul style="list-style-type: none"> - Retrieve start/end time for suite - Update result schema to support Robotframework Version 6.1 	
1.4.0	19.09.2023
Adaption for Robotframework 6.1 with change of TestSuite.source datatype	
1.4.1	15.03.2024
Update robot.xsd schema to support the new log level USER of Robotframework	
1.5.0	22.04.2024
Add optional argument <code>-interface</code> which allow to switch between db and rest interfaces	
1.5.1	14.06.2024
Fix issue when test result has SKIP status	
1.5.2	28.06.2024
Add optional argument <code>-testrunurl</code> to specify link to test job such as Jenkins or Gitlab CI/CD	
1.5.3	21.11.2024
Add support for robotframework result file version 7.x.x (result schema version 5)	
1.5.4	04.02.2025
Add support for robotframework (extended version) result file with thread feature	
1.6.0	24.02.2026
Usage of Setuptools replaced by usage of PIP/TOML/Setuptools	

RobotLog2DB.pdf

Created at 24.06.2026 - 05:30:37

by GenPackageDoc v. 0.44.0 / 05.06.2026
